

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property  
Organization  
International Bureau



(43) International Publication Date  
13 May 2004 (13.05.2004)

PCT

(10) International Publication Number  
**WO 2004/039581 A1**

(51) International Patent Classification<sup>7</sup>: **B32B 17/10**,  
C08K 5/00, 5/10, C08L 29/14, E06B 5/20

Stephen, J. [US/US]; 110 Alapocas Drive, Wilmington,  
DE 19803 (US). RYMER, Donald, L. [US/US]; 4233  
School House Road, Little Hocking, OH 45742 (US).

(21) International Application Number:  
PCT/US2003/034736

(74) Agent: DOBSON, Kevin, S.; E.I. Dupont De Nemours  
And Company, Legal Patent Records Center, 4417 Lan-  
caster Pike, Wilmington, DE 19805 (US).

(22) International Filing Date: 29 October 2003 (29.10.2003)

(25) Filing Language: English

(81) Designated States (*national*): AE, AG, AL, AM, AT, AU,  
AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU,  
CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH,  
GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC,  
LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW,  
MX, MZ, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC,  
SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA,  
UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

(26) Publication Language: English

(30) Priority Data:  
60/421,945 29 October 2002 (29.10.2002) US


(71) Applicant (*for all designated States except US*): E.I. DU  
PONT DE NEMOURS AND COMPANY [US/US]; 1007  
Market Street, Wilmington, DE 19898 (US).

(84) Designated States (*regional*): ARIPO patent (GH, GM,  
KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW),  
Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM),  
European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE,

(72) Inventors; and  
(75) Inventors/Applicants (*for US only*): BENNISON,

[Continued on next page]

(54) Title: POLYVINYL BUTYRAL INTERLAYERS HAVING SUPERIOR ACOUSTICAL PROPERTIES AND METHOD OF PREPARING SAME

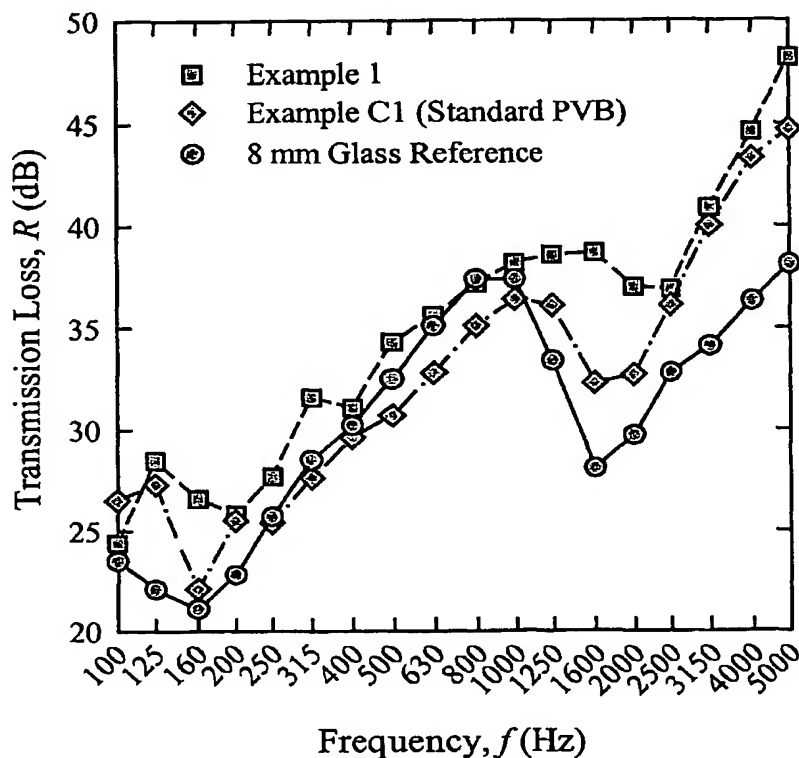

(57) Abstract: The present invention is a PVB interlayer that is plasticized with a single plasticizer and has sound-damping properties. Interlayers of the present invention when used in glass laminates can provide sufficient strength for use as safety glass laminates.